

Dexion EasyFit Compactus®



Product overview

The Dexion EasyFit Wire Compactus® range provides a clear, continuous area for optimal sterilisation and can dramatically improve the storage capacity of your floor space. EasyFit Wire Compactus® can easily be re-configured to suit storage of any kind, including medical equipment and consumables.

EasyFit Wire Compactus® utilises an overhead rail to guide the mobile shelving bays within the unit, which are fitted with castors to ensure the floor below can easily be cleaned.

The range is designed specifically for clinical environments to minimise the surface area which can harbour bacteria or dust and to allow a constant flow of air around the stored items. The EasyFit Wire Compactus® is available in three finish options to suit your application, chrome, zinc plated and stainless steel.

EasyFit Wire Compactus® offers an easy and cost effective way to optimise an assortment of storage and inventory requirements. EasyFit® Wire Compactus® is designed to use a number of mobile bays, running between static end bays, ensuring maximum use of floor space while improving your stock flow.

Dexion offers flexibility in design to ensure maximum efficiency can be achieved for every storage solution possible.

Key features and benefits

- Designed to suit clinical environments
- Easy to clean
- Maximises storage capacity in the available floor space
- Greater accessibility to stock and stored items
- Better visibility to stored items
- Wide range of accessories
- Warranty ranges from 3 yrs to 10 yrs depending on the finish and application.

Technical specifications

Heights	Static Bay: 2260mm
	Mobile Bay: 2040mm
Widths	757mm
	910mm
	1060mm
	1215mm
Depths	355mm
	460mm
	533mm
	610mm
Adjustment pitch	25.4mm
Options	Double deep bays
Finishes	Chrome
	Zinc plated
	Stainless steel 304
Accessories	Shelf Ledges
	Shelf Dividers
	Accessory Rails
	Label Holders

All dimensions shown in millimetres (mm).



Dexion EasyFit Compactus[®]

Shelf loads

Shelves have the following maximum load rating. These ratings are based on a uniformly distributed load (UDL).


Shelf width (mm)	Shelf width (mm)				
	610	757	910	1060	1215
Bay depth (mm)	610	757	910	1060	1215
355	180kg	180kg	180kg	180kg	130kg
460	180kg	180kg </td <td>180kg</td> <td>180kg</td> <td>130kg</td>	180kg	180kg	130kg
533	250kg	200kg	180kg	180kg	130kg
610	250kg	200kg	180kg	180kg	130kg

Maximum Static Bay Load: It is recommended not to exceed 650kg per static bay (i.e. 130kg per shelf level based on 5 levels).

Maximum Mobile Bay Load: It is recommended not to exceed of 275kg per mobile bay (i.e. 55kg per shelf level based on 5 levels).

Note: For heavier mobile bay loads option, heavier duty castors can be specified upon request. Please contact Dexion for technical guidance.

Overall dimensions

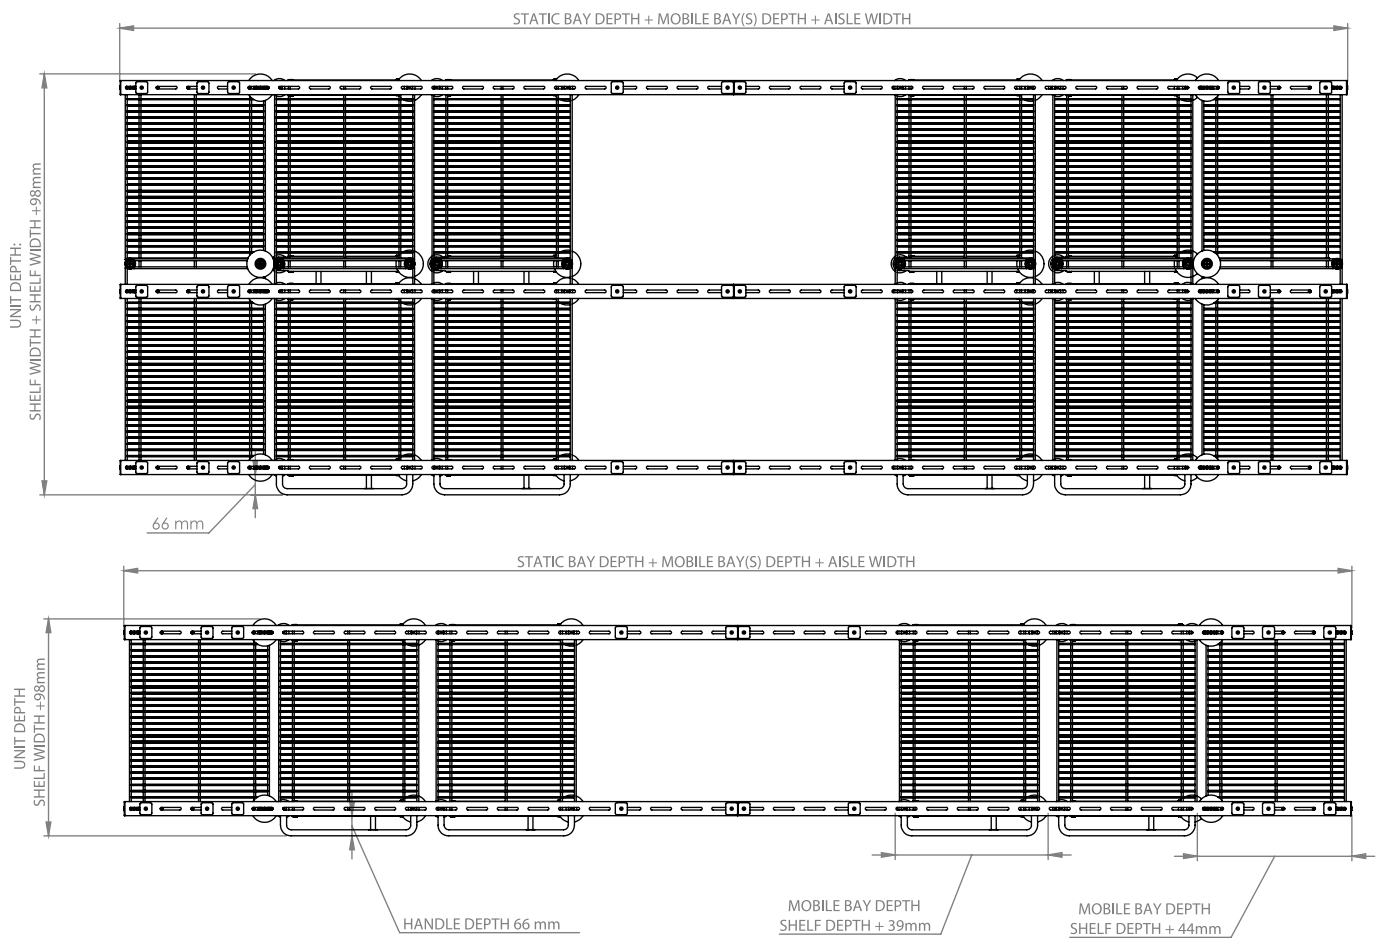

* A track length of 6.0mtr or greater will require intermediate static bays.

Contact

For more information on the Dexion EasyFit Compactus[®], please contact us on 1300 180 358.

Disclaimer:

The Information contained herein is the intellectual property of Dexion. The Information is defined to include: data, text, images, specification, graphics, design details and any and all other information whatsoever contained herein. The Information has been produced exclusively for Dexion and may not be used for any other purpose. None of the information may be used, altered, edited, copied, distributed or duplicated in any way without the express written consent of Dexion. Whilst the utmost care is taken to ensure the accuracy of the information contained herein, Dexion makes no guarantee as to its accuracy. Dexion shall, under no circumstances, be liable for any costs, losses, expenses or damages which may in any way be attributable to the use or adoption of such data and/or design details. All dimensions indicated are nominal only. Dexion reserves the right to alter or amend any of the information herein, including data and design details, without prior notice.

